



FRATA

Specifications:

- **Standard:**
 - **FAA (USA):** L-810
 - **COMAER (Brazil):** 1424-GC3
- **Light Intensity:** 32 cd – Night
- **Light Source:** LED 100.000 hours
- **Color:** Red
- **Day / Night Sensor:** Included
- **Operating Frequency:** Continuous light
- **Beam of Light:** 360° Horizontal
- **Protection:** IP65
- **Weight:** 1.3 lbs (0.6 Kg)
- **Operating Temperature:** 14°F ~ 131°F (-10°C ~ +55°C)
- **Enclosure:** Aluminium, Polycarbonate (UV Protection)
- **Consumption:** 4 W
- **Applications:** Telecommunications, Radio, TV Towers, Buildings, Masts, Poles and other structures.

Aviation Obstruction Light Low Intensity


(Aluminum or PVC pipe)



Signaling at the intermediate or top of structures of up to 45 meters

Frata Codes Aluminum pipe:

- ❑ **1084** Voltage: 12VDC
- ❑ **1540** Voltage: 24VDC
- ❑ **1355** Voltage: 90~240 VAC
- ❑ **1823** Voltage: 90~240 VAC RF

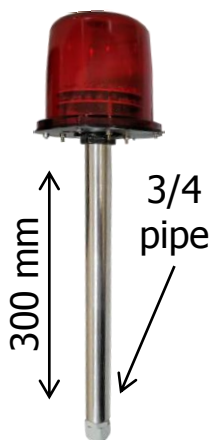

Frata Codes PVC pipe:

- ❑ **2098** Voltage: 12VDC
- ❑ **1516** Voltage: 24VDC
- ❑ **1087** Voltage: 90~240 VAC
- ❑ **1602** Voltage: 90~240 VAC RF
- ❑ **1668** Voltage: 90~240 VAC AF

