



FRATA

Specifications:


- **Standard:**
 - **COMAER (Brazil):** 1424-GC3
- **Light Intensity:**
 - Conductor current between 10 A and 50 A = 10cd
 - Conductor current greater than 50 A = 32cd
- **Line Voltage:** 1 to 500 KV
- **Frequência de linha:** 50/60Hz
- **Line Frequency:** 15mm to 40mm
- **Photocell:** Yes (activation at 50 Lux)
- **Body material:** Aluminum and Polycarbonate with UV protection
- **Fixation:** Stainless steel screws
- **Weight:** 9 lbs (4,1 Kg)

Luminous Beacon for Energized Conductors

FRATA's Code: 3737



Light Signaling for Energized Cables

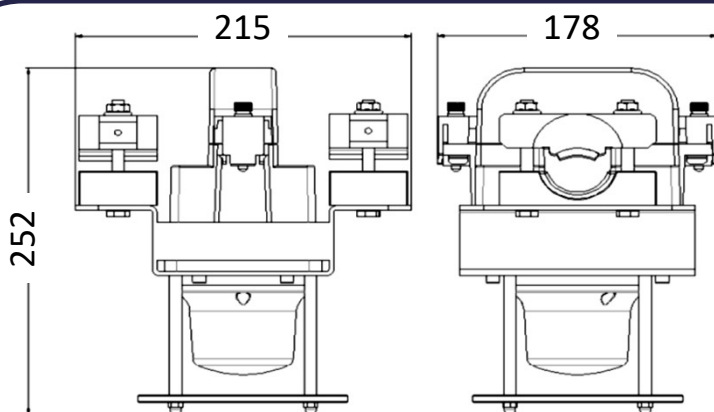

Measurements in millimeters

