



FRATA

Specifications:



- **Standard:**
 - **FAA (USA):** L-864
 - **COMAER (Brazil):** 1424-GC3
- **Light Intensity:** 2000 cd - Night
- **Light Source:** LED 100.000 hours
- **Color:** White
- **Day / Night Sensor:** Yes
- **Operating Frequency:** 20 pulses per minute
- **Beam of Light:** 360° Horizontal
- **Protection:** IP65
- **Weight:** 9.9 lbs (4.5 Kg)
- **Operating Temperature:** 14°F ~ 131°F (-10°C ~ +55°C)
- **Enclosure:** Galvanized and Painted Steel Base; Aluminum Body and Polycarbonate Lens with UV Protection
- **Power:** 90~240 VAC – RF
- **Consumption:** 10W
- **Applications:** Exclusively Developed for Radio Towers

AERONAUTICAL BEACON MEDIUM INTENSITY EXCLUSIVE FOR RADIO TOWERS


FRATA's Code: 1364



**Top signaling for
structures above
45 meters**

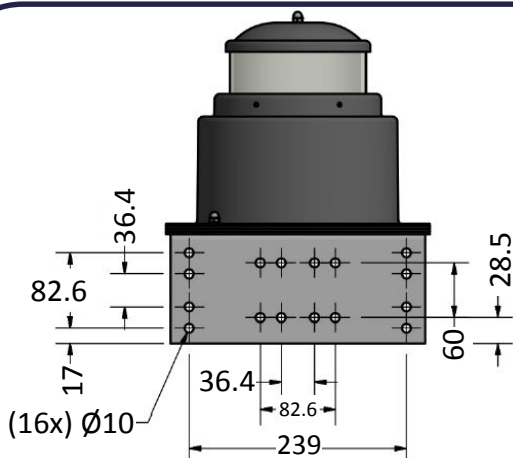

**Measurements in
millimeters**



**Comes with
U Clamp**