



FRATA

Specifications:




- **Standard:**
 - **FAA (USA):** L-864
 - **COMAER (Brazil):** 1424-GC3
- **Light Intensity:** 2000 cd
- **Light Source:** LED 100.000 hours
- **Color:** Red
- **Day / Night Sensor:** Included
- **Operating Frequency:** Flashes
- **Beam of Light:** 360° Horizontal
- **Protection:** IP65
- **Weight:** 8.4 lbs (3.8 kg)
- **Operating Temperature:** 14°F ~ 131°F (-10°C ~ +55°C)
- **Enclosure:** Galvanized and Painted Steel, Polycarbonate (UV Protection)
- **Input Voltage:** 10W Solar Panel
- **Battery:** *Lithium-ion*
- **Autonomy:** 3 days (in cloudy and rainy weather)
- **Applications:** Transmission Line, Telecommunications Towers, Anemometric, Radio, TV, Rooftop, Masts, Poles, among other structures.

Aviation Obstruction Light Medium Intensity - Solar

FRATA's Part Number: 2064



**Signaling for the top
of structures above
45 meters**

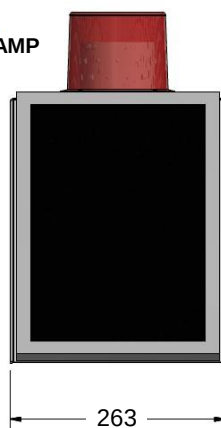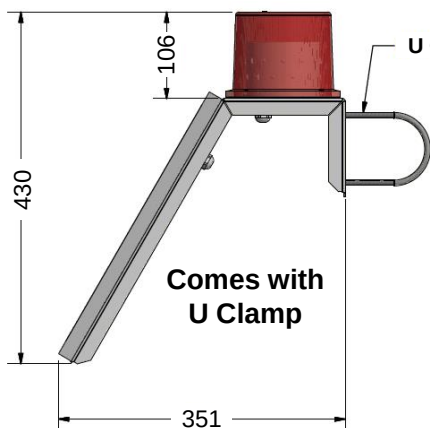

**Measurements
in millimeters**

