




FRATA

Specifications:

- **Standard:**
 - **FAA (USA):** L-810
 - **COMAER (Brazil):** 1424-GC3
- **Light Intensity:** 32 cd – Night
- **Light Source:** LED 100.000 hours
- **Color:** Red
- **Day / Night Sensor:** Included
- **Operating Frequency:** Continuous light
- **Beam of Light:** 360° Horizontal
- **Protection:** IP65
- **Weight:** 1.3 lbs (0.6 Kg)
- **Operating Temperature:** 14°F ~ 131°F (-10°C ~ +55°C)
- **Consumption:** 4 W
- **Applications:** Telecommunications, Radio, TV Towers, Buildings, Masts, Poles and other structures.


Aviation Obstruction Light Low Intensity

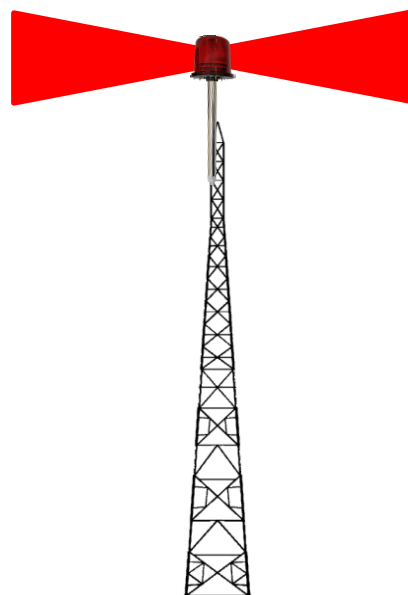

Signaling for the top of structures up to 45 meters

Frata Codes Polycarbonate (UV Protection) and Aluminum Pipe:

- ❑ **1084** Voltage: 12VDC
- ❑ **1540** Voltage: 24VDC
- ❑ **1355** Voltage: 90~240 VAC
- ❑ **1823** Voltage: 90~240 VAC RF

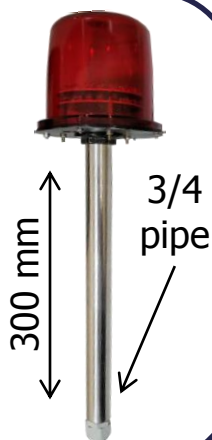

Frata Codes Polycarbonate (UV Protection) and PVC Pipe:

- ❑ **2098** Voltage: 12VDC
- ❑ **1516** Voltage: 24VDC
- ❑ **1087** Voltage: 90~240 VAC
- ❑ **1602** Voltage: 90~240 VAC RF
- ❑ **1668** Voltage: 90~240 VAC AF

