



FRATA


Specifications:

- **Standard:**
 - **FAA (USA):** L-864
 - **COMAER (Brazil):** 1424-GC3
- **Light Intensity:** 2000 cd – Night
- **Light Source:** LED 100.000 hours
- **Color:** Red
- **Day / Night Sensor:** Included
- **Operating Frequency:** Flashes
- **Beam of Light:** 360° Horizontal
- **Protection:** IP65
- **Weight:** 3.3 lbs (1.5 Kg)
- **Operating Temperature:** 14°F ~ 131°F (-10°C ~ +55°C)
- **Enclosure:** Aluminium, Polycarbonate (UV Protection)
- **Consumption:** 10W
- **Applications:** Telecommunications, Radio, TV towers among other structures.

Frata Codes:

- ☐ **429** Voltage: 12VDC
- ☐ **1539** Voltage : 24VDC
- ☐ **2298** Voltage: 24VDC
- ☐ **1719** Voltage: 90~240VAC
- ☐ **1859** Voltage: 90~240VAC **RF**
- ☐ **2899** Voltage: 90~240VAC **AF**

Aviation Obstruction Light Medium Intensity - Compact

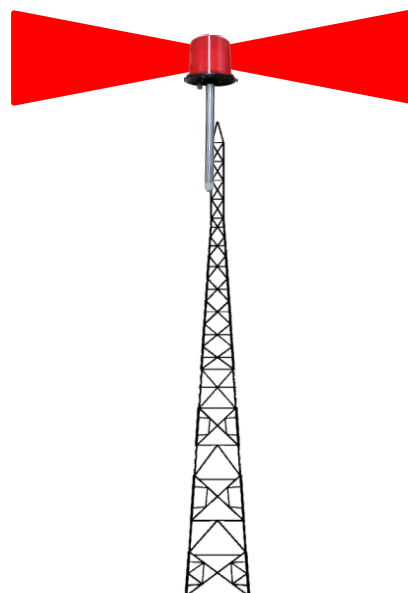

**Signaling for the top
of structures up to
45 meters**

